




JAPAN IMPORTED BEARINGS CO., LTD

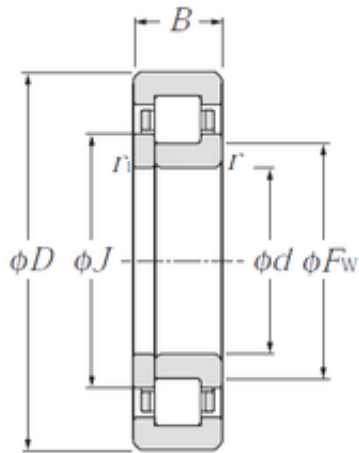

60 mm x 110 mm x 22 mm NTN NUP212
cylindrical roller bearings

Bearing No. NUP212

Size	60x110x22 mm
Bore Diameter	60 mm
Outer Diameter	110 mm
Width	22 mm
d	60 mm
Fw	73,5 mm
D	110 mm
B	22 mm
C	22 mm
r min.	1,5 mm
r1 min.	1,5 mm
J	78,4 mm
Weight	0,818 Kg
Basic dynamic load rating (C)	68,5 kN
Basic static load rating (C0)	75 kN
(Grease) Lubrication Speed	6 400 r/min
E	97.5 mm
F	73.5 mm
d1	78.4 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	CN
Mass (without HJ ring)	0.92 kg
Dynamic load, C	68.5 kN
Static load, C0	75 kN

NUP212 Bearing 2D drawings and 3D CAD models



JAPAN IMPORTED BEARINGS CO., LTD

Fatigue limit load, Cu	9.1 kN
Nlim (oil)	7,600 rpm
Nlim (grease)	6,400 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
da min	68 mm
dc min	80 mm
Da max	102 mm
ra max	1.5 mm
Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.916
EAN	4547359134582
Product Group	B04144
Bore Profile	Straight
Cage Material	Steel
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	No
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C3-Loose
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	1 Rib Inner Ring with Side Plate 2 Rib Outer Ring Cage On Outer Ring ID



JAPAN IMPORTED BEARINGS CO., LTD

Long Description	60MM Bore; Straight Bore Profile; 110MM Outside Diameter; 22MM Width; Steel Cage Material; RBEC 1 ISO P0; Single Row; Not Separable; No Snap Ring; Relubricatable; C3-Loose Internal Clearance; Retai
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	NUP212
Weight / LBS	2.024
Outside Diameter	4.331 Inch 110 Millimeter
Bore	2.362 Inch 60 Millimeter
Width	0.866 Inch 22 Millimeter